


## NEC MultiSync® P555 LCD 55" Professional Large Format Display

### Datasheet

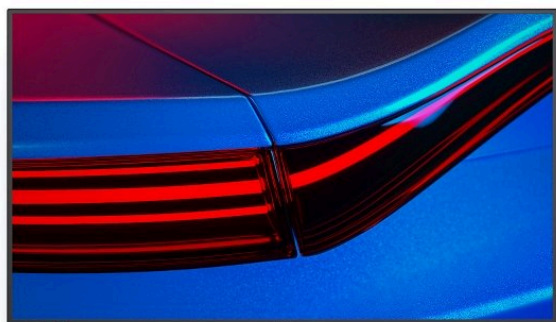

#### When imaging precision cannot be compromised

When imaging precision and 24/7 operational reliability cannot be compromised, the 5th generation of NEC MultiSync® P series presents best-in-class performance with an advanced feature set for mission-critical applications

Unparalleled clarity of detail and colour accuracy is achieved with 8K signal processing, wide colour gamut and the integrated NEC SpectraView® engine controlling all visual parameters. Even in bright ambient light conditions, high brightness levels of 700 cd/m<sup>2</sup> combined with a high haze filter guarantees exceptional readability with no annoying reflections. Despite its slim, elegant profile, the quality build is robust for use in public spaces, with an all-metal chassis for fire-retardancy. Featuring NEC Open Modular Intelligence (OMI) slot-in technology, choose scalable computing power with Raspberry Pi Compute Module 4 or the more powerful Intel® Smart Display Modules (Intel®SDM) for tailor-made signage solutions.

For best visualisation in control rooms and production lines, for passenger information and wayfinding signage; the NEC P Series is trusted for safety and long-life, fit-for-purpose performance.

#### Benefits

**Secure remote management** – control your devices remotely and securely using NEC NaviSet Administrator 2; proactively manage maintenance requirements saving time and resources

**Unhindered readability** – no reflections from windows or other light sources means no disruption to the visibility of signage content or meeting room presentation

**Safe for public environments** – a metal back cover and intelligent heat management ensure safe use in public spaces where fire-retardancy is mandatory

**Enhanced imaging performance** – advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.

**Mission-critical 24/7 ready operation** – the meticulous selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.

## Product Information

Product Name	NEC MultiSync® P555
Product Group	LCD 55" Professional Large Format Display
Order Code	P555

## Display

Panel Technology	IPS with Edge LED backlights
Screen Size [inch/cm]	55 / 138.8
Aspect Ratio	16:9
Brightness [cd/m <sup>2</sup> ]	700
Contrast Ratio	≥ 8000:1 <sup>1</sup>
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.073 (10bit)
Colour Gamut	86% of DCI
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	Pro (28)
Supported Orientation	Landscape, Portrait, Face Up, Face Down <sup>2</sup>

## Synchronisation Rate

Horizontal Frequency [kHz]	15 - 135
Vertical Frequency [Hz]	23 - 76

## Resolution

Native Resolution	3840 x 2160			
Supported Resolutions	7680 x 4320; 4096 x 2160; 3840 x 2160; 2560 x 1600;	2560 x 1440; 1920 x 2160; 1920 x 1200; 1920 x 1080;	1600 x 1200; 1440 x 900; 1400 x 1050; 1366 x 768;	1360 x 768; 1280 x 1024; 1280 x 720; 1024 x 768

## Connectivity

Input Video Digital	2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Digital	1 x DisplayPort; 2 x HDMI
Input Control	LAN 100Mbit; remote control wire (3,5mm jack); RS232
Input Data	1 x USB 2.0 (Downstream); 1 x USB 2.0 (Powered 5V/2A, Firmware Updates); 1 x USB 2.0 Type-B (Downstream)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, SDM slot-in PC); 1 x HDMI (loop through: HDMI, SDM slot-in PC)
Output Audio Analogue	1 x 3,5 mm jack
Output Control	1 x LAN 100Mbit
Input Detect	Custom; First; Last
PIP/PbP	Dual-Split; Quad-Split; scalable picture size

## Calibration

Factory Calibration	Gamma; Intensity; RGB; Uniformity; White Point
Sensor Calibration (through USB)	PC-less Calibration with USB Sensor MDSVSensor3; White Copy (post self-calibration)
Calibration with Software	Corner Uniformity; Gamma; Intensity; RGB; Update Factory Calibration; White Point
Calibration Software	NEC Display Wall Calibrator

## Open Modular Intelligence

Intel® SDM	accepts Intel® Smart Display Modules Large and Small up to 66 W
Compute Module Slot	RPi Compute Module 4

## Sensors

Ambient Light Sensor	Integrated, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable

## Electrical

Power Consumption Eco/max. [W]	110 shipping
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)
Power Management	VESA DPMS
Power Supply	100-240 V AC; 50/60 Hz; internal

## Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to 60

## Mechanical

Dimensions (W x H x D) [mm]	1,239.6 x 713 x 61.1
Weight [kg]	27.6
Bezel Width [mm]	12 (top); 12.5 (left and right); 15.6 (bottom)
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
Ingress Protection	IP5x (front); IP2x (back)
Packaging Dimensions (W x H x D) [mm]	1,430 x 920 x 250
Packaging Weight [kg]	37.7
Colour Bezel	Pantone 426M (black)
Material	Metal

## Available Options

Accessories	Feet (ST401/ST-43M); Soundbar (passive: SP-PSCM-IQ / SP-PSCM); Speaker (SP-TF1, SP-RM3)
-------------	---

## Green Features

Energy Efficiency	Energy consumption: 109 kWh/1000 h; Energy efficiency class: G; LED backlight
-------------------	---

## Additional Features

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo
Pixel Failure Class	ISO 9241-307, Class 1
Shipping Content	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension <sup>3</sup>
Operating Hours	24/7
External Control	AMX NetLinx Support; ASCII Control Commands; Crestron Connected; HDMI CEC; HTTP Browser; PJLink; Scheduled Timer; SNMP
Remote Management	Automated Email Alerts; NEC NaViSet Administrator 2

Security Disable HW Buttons; Disable IR Functionality; Emergency Notification

---

Resistance to Fire Metal backcover, plastic material certified acc. to UL94-5VB

---

<sup>1</sup> out of the box conditions, local dimming ON

<sup>2</sup> adjusted usage conditions for face up/down installations, please refer to operational guidelines or contact our support

<sup>3</sup> please refer to terms and conditions of warranty extensions

NEC Australia Pty. Ltd. reserves the right to change product specifications, functions, or features, at any time, without notice. Please refer to your local NEC representatives for further details. Although all efforts have been made to ensure that the contents are correct, NEC shall not be liable for any direct, indirect, consequential or incidental damages resulting from the use of the equipment, manual or any related materials. The information contained herein is the property of NEC Australia Pty. Ltd. and shall not be reproduced without prior written approval from NEC Australia Pty. Ltd.

©2021 NEC Australia Pty. Ltd. All rights reserved. NEC and NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All other trademarks are the property of their respective owners. All rights reserved. Printed in Australia. Note: This disclaimer also applies to all related documents previously published.