


NEC MultiSync® M751
LCD 75" Message Large Format Display

Datasheet

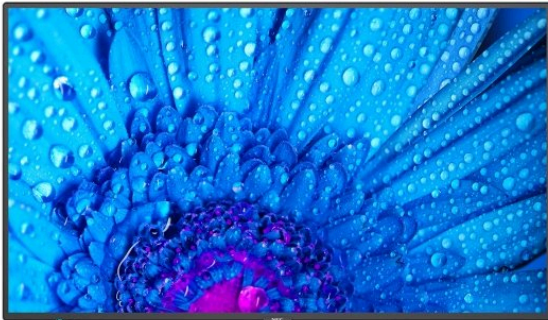

Intuitive professional content delivery

Great first impressions can make all the difference; presenting your business in the best possible way will boost your brand. With slim, modern styling, 24/7 operation and high haze panel to reduce reflections when ambient light is high, the M series is the professional way to deliver your message, yet at an attractive price point.

With the optional NEC MediaPlayer or the more powerful Intel® Smart Display Module (Intel® SDM) computing device, you are primed and ready for intuitive signage creation delivering real-time media playback for exceptional visual experiences. For advertising, infotainment and meeting room applications, the M Series provides powerful, upgradable functionality and all the aesthetic appeal to effortlessly reflect your brand credentials.

Benefits

Unhindered readability - no reflections from windows or other light sources means no disruption to the visibility of signage content or meeting room presentation

Enhanced imaging performance - advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.

Secure remote management - control your devices remotely and securely using NEC NaviSet Administrator 2; proactively manage maintenance requirements saving time and resources

Mission-critical 24/7 ready operation - the meticulous selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.

Future Ready Connectivity - featuring multiple industry standard digital and analogue signal inputs for flexible integration into AV infrastructures.

Product Information

Product Name	NEC MultiSync® M751
Product Group	LCD 75" Message Large Format Display
Order Code	M751

Display

Panel Technology	IPS with Direct LED backlights
Screen Size [inch/cm]	75 / 189.3
Aspect Ratio	16:9
Brightness [cd/m ²]	500
Contrast Ratio	≥ 8000:1 ¹
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.073 (10bit)
Colour Gamut	72% of DCI
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	Pro (25)
Supported Orientation	Landscape; Portrait

Resolution

Native Resolution	3840 x 2160			
Supported Resolutions	1024 x 768; 1280 x 1024; 1280 x 720; 1360 x 768;	1366 x 768; 1400 x 1050; 1440 x 900; 1600 x 1200;	1920 x 1080; 1920 x 1200; 1920 x 2160; 2560 x 1440;	2560 x 1600; 3840 x 2160; 4096 x 2160; 7680 x 4320

Synchronisation Rate

Horizontal Frequency [kHz]	15 - 135
Vertical Frequency [Hz]	23 - 76

Connectivity

Input Video Digital	2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Digital	1 x DisplayPort; 2 x HDMI
Input Control	LAN 100Mbit; remote control wire (3,5mm jack); RS232
Input Data	1 x USB 2.0 (Downstream); 1 x USB 2.0 (Powered 5V/2A, Firmware Updates); 1 x USB 2.0 Type-B (Downstream)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, SDM slot-in PC); 1 x HDMI (loop through: HDMI, SDM slot-in PC); DP (in) to HDMI (out) conversion
Output Audio Analogue	1 x 3,5 mm jack
Output Control	1 x LAN 100Mbit
Input Detect	Custom; First; Last
PIP/PbP	Dual-Split; Quad-Split; scalable picture size

Calibration

Factory Calibration	Gamma; Intensity; RGB; Uniformity; White Point
Sensor Calibration (through USB)	PC-less Calibration with USB Sensor MDSV Sensor3; White Copy (post self-calibration)
Calibration with Software	Corner Uniformity; Gamma; Intensity; RGB; Update Factory Calibration; White Point
Calibration Software	NEC Display Wall Calibrator

Open Modular Intelligence

Intel® SDM	accepts Intel® Smart Display Modules Large and Small up to 66 W
Compute Module Slot	RPi Compute Module 4

Sensors

Ambient Light Sensor	Integrated, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable

Electrical

Power Consumption Eco/max. [W]	205 shipping
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)
Power Management	VESA DPMS
Power Supply	100-240 V AC; 50/60 Hz; internal

Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 80
Storage Temperature [°C]	-20 to 60

Mechanical

Dimensions (W x H x D) [mm]	1,682.3 x 961.1 x 83.2
Weight [kg]	38
Bezel Width [mm]	14.3 (left, right and top); 14.8 (bottom)
VESA Mounting [mm]	4 holes; 600 x 400 (FDMI); M8
Ingress Protection	IP5x (front); IP2x (back)
Packaging Dimensions (W x H x D) [mm]	1,830 x 1,070 x 225
Packaging Weight [kg]	51.5
Colour Bezel	Pantone 426M (black)
Material	Metal

Available Options

Accessories	Feet (ST-801); Speaker (SP-RM3); Trolley (L20PNSR780MEU, PD02MHA, PD03MHA); Wall mount (L20PNWALL90EU, SF680P)
-------------	--

Green Features

Energy Efficiency	Energy consumption: 145 kWh/1000 h; Energy efficiency class: G; LED backlight
Ecological Standards	EnergyStar 8.0

Additional Features

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo
Safety and Ergonomics	BSMI; CE; EAC; EMC Class B; Energy Star 8; FCC Class B; KC/KCC; PSB; RCM; RoHS; VCCI
Pixel Failure Class	ISO 9241-307, Class 1
Audio	Integrated Audio Amplifier (for optional speakers up to 2 x 15 W); Integrated Speakers (10 W + 10 W)
Shipping Content	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension ²

Operating Hours	24/7
External Control	AMX NetLinx Support; ASCII Control Commands; Crestron Connected; HDMI CEC; HTTP Browser; PJLink; Scheduled Timer; SNMP
Remote Management	Automated Email Alerts; NEC NaViSet Administrator 2
Security	Disable HW Buttons; Disable IR Functionality; Emergency Notification
Resistance to Fire	Metal backcover, plastic material certified acc. to UL94-5VB

¹ out of the box conditions, local dimming ON

² please refer to terms and conditions of warranty extensions



RCM



RoHS



CE



VCCI



FCC Class B

NEC Australia Pty Ltd reserves the right to change product specifications, functions, or features, at any time, without notice. Please refer to your local NEC representatives for further details. Although all efforts have been made to ensure that the contents are correct, NEC shall not be liable for any direct, indirect, consequential or incidental damages resulting from the use of the equipment, manual or any related materials. The information contained herein is the property of NEC Australia Pty Ltd and shall not be reproduced without prior written approval from NEC Australia Pty Ltd.

©2023 NEC Australia Pty Ltd. All rights reserved. NEC and NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All other trademarks are the property of their respective owners. All rights reserved. Printed in Australia. Note: This disclaimer also applies to all related documents previously published.

**For more information, visit nec.com.au,
email contactus@nec.com.au or call 131 632**