


Product Information Sheet

X464UNS-2 LCD 46" Video Wall Display

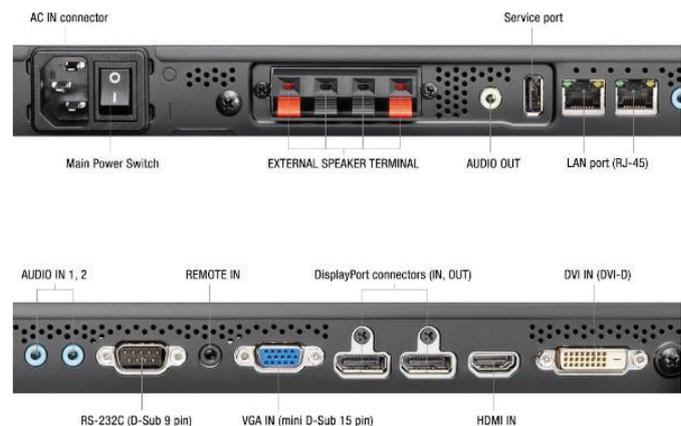

Video Walls you can rely on

The ultra slim X464UNS-2 sets the standard for video wall technology. Featuring a minimal 3.5 mm bezel these display modules create impressive high resolution video walls with barely visible image gaps. With perfect picture quality and high product reliability, these displays are designed for the rigors of 24/7 operation. At a high brightness level of 700 cd/m² your message will be well received with effortless readability even in the brightest ambient light conditions. The panel size of 46" makes these video wall displays ideal for narrow spaces, for mobile use or frequent set-up and take-down in rental installations. An advanced set of intelligent features make the displays easy to install and operate and support significantly reduced maintenance requirements.

NEC's vast experience in the video wall market is evident in the design of the X464UNS-2 with features that reduce costs, ease installation and improve the visual impact of content in control rooms, broadcast studios, transport installations, retail signage and the rental market.

Benefits

- **Compelling Image Presentation** – the display can be hardware colour and brightness calibrated to secure a consistent image presentation over the entire video wall.
- **Continous Workflow** – reliable and secure for mission critical applications with 24/7 operational performance.
- **Reduced Installation and Operating Costs** - highly energy efficient LED backlit display ensures low power consumption, longer backlight lifetime and lighter design for easy transportation, mounting and integration.
- **Smart Way to Large Scale perfectly detailed Imagery** – native UHD Daisy Chaining enables the user to create UHD video walls with either a single UHD image or 4 different Full HD sources.
- **Easy Setup** – Auto TileMatrix offers time and cost savings during installation. Configure just one display in order to complete the set up for the entire wall.
- **Perfect Visual Experience** – FrameComp supports a seamless appearance, crucial for fast moving content, creating one stunning image by synchronising the content across the entire video wall.
- **Secure Reliability and Longevity of Video Walls** – unique NEC heat management system enables the user to monitor and

control the heat inside the display.

- **Future Ready with OPS Cable Free Expansion** – upgrade the power of your display at any time while seamlessly integrating one of our various Slot-in PCs, signal interfaces and other OPS compatible products without the need for external cables or devices. display devices from a centralised location.
- **Free Download of Multi-Display Management Software** – with NaViSet Administrator 2 you can manage all your connected display devices from a centralised location.

Product Information

Product Name	X464UNS-2
Product Group	LCD 46" Video Wall Display
Order Code	X464UNS-2

Display

Panel Technology	S-PVA with direct LED backlight
Active Screen Area (W x H) [mm]	1,018.1 x 572.7
Screen Size [inch/cm]	46 / 116.8
Brightness [cd/m ²]	700, 420 Eco (shipment setting)
Contrast Ratio (typ.)	3500:1
Viewing Angle [°]	178° Vert., 178° Hor. at CR>10
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	25
Supported Orientation	Landscape; Portrait;

Synchronisation Rate

Horizontal Frequency [kHz]	15.625/15.734, 31.5 - 91.1
Vertical Frequency [Hz]	50.0 - 85.0 (Analog Input) /24.0 - 85.0 (Digital Input)

Resolution

Native Resolution	1920 x 1080 at 60 Hz
Supported on DisplayPort	3840 x 2160 at 60/30/24Hz; 1920 x 1080 at 60Hz; 1080p, 1080i, 720p at 50/60Hz; 576p at 50Hz; 480p at 60Hz
Supported on HDMI	4096 x 2160 at 24Hz; 3840 x 2160 at 30/25/24Hz; 1920 x 1080 at 60Hz; 1080p, 1080i, 720p at 50/60Hz; 576p at 50Hz; 576i at 50Hz; 480p at 60Hz; 480i at 60Hz

Connectivity

Input Video Analogue	1 x D-sub 15 pin
Input Video Digital	1 x DisplayPort (with HDCP); 1 x DVI-D (with HDCP); 1 x HDMI (with HDCP)
Input Audio Analogue	2 x 3.5 mm jack
Input Audio Digital	1 x DisplayPort; 1 x HDMI
Input Control	1 x LAN 100Mbit; 1 x Remote Control (3.5 mm jack); 1 x RS232
Output Video Digital	1 x DisplayPort out (loop through: DisplayPort, DVI-D, HDMI, Interface Extension Slot, OPS)
Output Audio Analogue	1 x 3.5 mm jack
Output Control	1 x LAN 100Mbit

Open Modular Intelligence

OPS Slot	Slot Technology: Open pluggable specification (NEC / Intel OPS standard)
OPS Max. Current / Power Consumption [A / W]	10 / 61

Interface Extension Slot

Slot Technology	analogue and digital interface extension (NEC standard)
-----------------	---

Sensors

Ambient Light Sensor	Optional, triggered actions programmable
Human Sensor	Optional, external, 4-5m range, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable
NFC Sensor	Integrated, 2cm range, free NEC Android App required

Electrical

Power Consumption [W]	120 (Normal Operation)
Power Savings Mode [W]	<0.5 (STANDBY); < 2.5 (POWER SAVE)
Power Management	VESA DPMS

Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80

Mechanical

Dimensions (W x H x D) [mm]	1,022 x 576.6 x 101.7
Weight [kg]	19.9
Bezel Width [mm]	1.2 bottom/right; 2.3 top/left; content-to-content 3.5
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
Ingress Protection	IP40 (front); IP20 (back)

Additional Features

Special Characteristics	Auto ID assignment; Auto tiling function; Automatic Alarm E-Mails; DICOM support; Frame Comp; HTTP Server; Image flip; Intelligent Wireless Data (based on NFC); NaViSet Administrator 2; Point Zoom Function; Programmable 10-bit LUT with 3 memory banks; Sticky Note Function in OSD; Super slim bezel with 3.7 mm between contents and 3.5 mm bezel width; TileMatrix; User readable log function
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	C-tick; CE; Energy Star 6.0; FCC Class B; PSB; RoHS; TÜV GS; UL/C-UL or CSA; VCCI
Audio	Optional Speakers (15 W + 15 W)
Shipping Content	CD-ROM (User Guides/Manuals); Display; DisplayPort Cable; Free LAN control software (download); Power Cable Signal Cable: LAN cable
Warranty	3 years conditional warranty
Operating Hours	24/7

Available Options

Accessories	NEC Wall Mounts (WM-46UN-L3, WM-46UN-P2), Chief Mounts (FCAV1U+LSM1U, FCAV1U+MSM1U, LVS1U)
-------------	--

Interface Extension	SB3-AB1 analogue: Audio; Component; Composite; S-Video SB3-AB2 analogue: Audio; RGBHV SB3-DB1 digital: 2 x HDMI
OPS Slot	HD-SDI 1.5G and 3G; HDBaseT receiver; Intel® Celeron, Core i3, i5, i7 Slot-in PCs; OPS Digital Signage Player

Green Features

Energy Efficiency	Ambient light sensor; Annual energy consumption: 179 kWh (based on 4 operating hours per day); Carbon savings meter; ECOMode; Energy efficiency class: B; Human Sensor
Ecological Materials	Manuals on CD; Optional feet

For more information, visit au.nec.com, email contactus@nec.com.au or call 131 632

Corporate Headquarters (Japan)

NEC Corporation
www.nec.com

Australia

NEC Australia Pty Ltd
au.nec.com

North America (USA)

NEC Corporation of America
www.necam.com

Asia Pacific (AP)

NEC Asia Pacific
sg.nec.com

Europe (EMEA)

NEC Enterprise Solutions
www.nec-enterprise.com

v.05.04.18 | X464UNS-2

NEC Australia Pty Ltd reserves the right to change product specifications, functions, or features, at any time, without notice. Please refer to your local NEC representatives for further details. Although all efforts have been made to ensure that the contents are correct, NEC shall not be liable for any direct, indirect, consequential or incidental damages resulting from the use of the equipment, manual or any related materials. The information contained herein is the property of NEC Australia Pty Ltd and shall not be reproduced without prior written approval from NEC Australia Pty Ltd.

©2018 NEC Australia Pty Ltd. All rights reserved. NEC and NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All other trademarks are the property of their respective owners. All rights reserved. Printed in Australia. Note: This disclaimer also applies to all related documents previously published.